



# DXV MODULUS™

## MONOLITH ELONGATED TOILET



### D22020A100.415

#### FEATURES

---

- Modern elongated bowl design
- Slim high back tank
- Right Height® rim at 16-1/2" (419 mm) for accessible application
- High efficiency 1.28 gpf / 4.8 Lpf single flush with actuator
- 12" (305 mm) rough-in
- Made of vitreous china
- Duroplast™ slow-close seat included
- Removable panels for concealed install

#### DIMENSIONS

---

##### NOMINAL DIMENSIONS

28-5/8" x 15-1/2" x 31" (727 x 395 x 785 mm)

##### WATER SPOT

7-7/8" (200 mm) wide

9-1/4" (235 mm) length

5-1/2" (140 mm) distance to rim

#### COLORS/FINISHES

---

Canvas White (415)

#### COMPONENTS

---

5026A15G.415 Elongated Toilet Seat

735217-400.415 Tank Cover

7381903-200.XXX0A Single Flush Actuator  
Polished Chrome (0020A)  
Polished Nickel (0080A)  
Brushed Nickel (2950A)  
Matte Black (2430A)

#### COMPLIANCE CERTIFICATIONS

---

Meets or Exceeds ASME A112.19.2/CSA B45.1

EPA WaterSense® Certified

CEC and CALGreen® Compliant


ROUGH IN DIAGRAM SHOWN  
ON NEXT PAGE

CALGreen® is a registered trademark of California Building Standards Commission.



# DXV MODULUS™

## MONOLITH ELONGATED TOILET

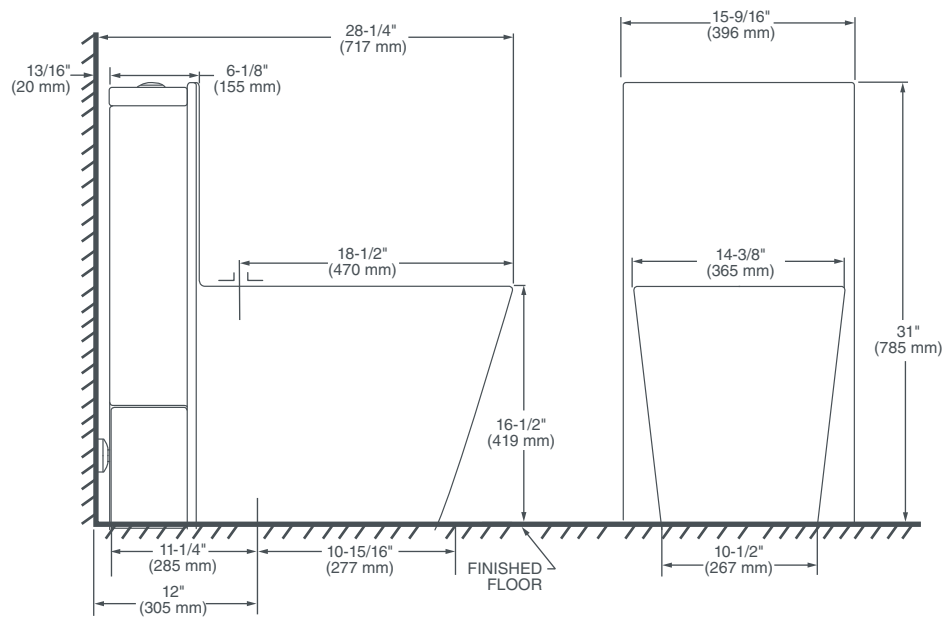

### IMPORTANT:

Water supply on the wall is required at 3-3/4" or 9" from centerline of the toilet (see rough-in).

First suggested position is hidden behind the toilet. The geometry of the toilet gives space for this installation.

### NOTES:

This toilet is designed to rough-in at a minimum dimension of 12" (305 mm) from finished wall to C/L of outlet.

Supply not included with fixture and must be ordered separately.

\* Dimensions shown for location of supply is suggested.

Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2.

These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

PART OF LIXIL